


# Twisted Flexible Electric Wire 450/750 V

## Twisted Flexible Electric Wire

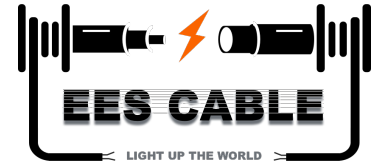

## Twisted Flexible Electric Wire 450/750 V

**Electric Wire for Connection for Electrical Appliances**

### Application

The products are suitable for power installation fixed wiring or flexible connection for electrical applications with rated voltage up to and including 450/750V respectively

### IEC 60227

Conductor: Class 5 Copper  
Insulation: PVC

Section	Max. Wire Diameter	Insulation Thickness	Overall Diameter	Cable Weight	Electrical Resistance
mm <sup>2</sup>	mm	mm	mm	kg/km	DC20C Ω/km
2X0.5	0.16	0.8	6.0	22.0	39.0
2X0,75	0.16	0.8	6.2	28	26.0
2X1	0.16	0.8	6.6	46	19.5
2X1.5	0.16	0.8	7.2	59	13.3
2X2.5	0.16	0.8	8.2	93.5	7.98
2X4	0.16	0.8	9.2	108	4.95
2X6	0.21	1.0	10.6	151	3.30