


Lead Sheathed AC High-voltage Submarine Cable

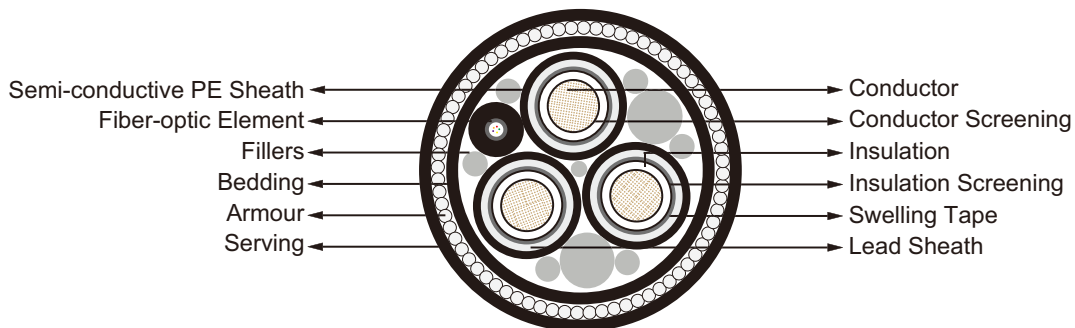


Application

These submarine cables are used for power transmission to offshore islands, oil platforms or to cross-rivers and lakes. Cable design based on the mayor national or international standards e.g. VDE, IEC and ICEA or according to customers design and standards.

Construction

- **Conductor:** Copper conductor, water blocked.
- **Conductor Screening:** Extruded semi-conductive compound.
- **Insulation:** XLPE.
- **Insulation Screening:** extruded semi-conductive compound.
- **Separator:** Swelling tape.
- **Core Sheath1:** Lead Sheath.
- **Core Sheath2:** Semi-conductive PE sheath.
- **Fillers:** Polypropylene filler.
- **Fibre-optic Element:** Fibre optic cable.
- **Bedding:** Bedding layer.
- **Armour:** Galvanized steel wires filled with bitumen compound.
- **Serving:** Polypropylene yarn.

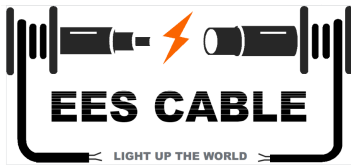

High Voltage Submarine Cables

www.eescable.com

Electrical Data

26/45(52) kV


Nominal Cross Section Area mm ²	Capacitance μF/km	Inductance mH/km	Charging Current per phase @50Hz A/km
95	0.18	0.43	1.5
120	0.19	0.42	1.6
150	0.21	0.40	1.6
185	0.22	0.39	1.8
240	0.24	0.37	2.0
300	0.26	0.36	2.2
400	0.29	0.35	2.3
500	0.32	0.33	2.6
630	0.35	0.32	2.9
800	0.38	0.31	3.1
1000	0.42	0.30	3.5

38/66(72.5) kV

Nominal Cross Section Area mm ²	Capacitance μF/km	Inductance mH/km	Charging Current per phase @50Hz A/km
95	0.17	0.44	2.0
120	0.18	0.43	2.1
150	0.19	0.41	2.3
185	0.20	0.40	2.4
240	0.22	0.38	2.6
300	0.24	0.37	2.8
400	0.26	0.35	3.1
500	0.29	0.34	3.5
630	0.32	0.33	3.7
800	0.35	0.32	4.1
1000	0.38	0.31	4.6

64/110(123) kV

Nominal Cross Section Area mm ²	Capacitance μF/km	Inductance mH/km	Charging Current per phase @50Hz A/km
185	0.14	0.46	2.8
240	0.15	0.43	3.0
300	0.17	0.41	3.5
400	0.20	0.38	3.9
500	0.22	0.37	4.3
630	0.24	0.36	4.7
800	0.26	0.34	5.2
1000	0.28	0.33	5.6

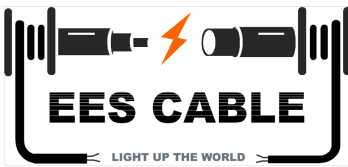

High Voltage Submarine Cables

www.eescable.com

76/132(145) kV

Nominal Cross Section Area mm ²	Capacitance μF/km	Inductance mH/km	Charging Current per phase @50Hz A/km
185	0.13	0.47	3.0
240	0.14	0.44	3.4
300	0.16	0.42	3.8
400	0.18	0.40	4.3
500	0.20	0.38	4.6
630	0.21	0.37	5.1
800	0.23	0.36	5.6
1000	0.25	0.35	6.1

87/150(170) kV


Nominal Cross Section Area mm ²	Capacitance μF/km	Inductance mH/km	Charging Current per phase @50Hz A/km
240	0.13	0.47	3.4
300	0.14	0.44	3.7
400	0.15	0.42	4.1
500	0.17	0.40	4.7
630	0.19	0.38	5.3
800	0.21	0.37	5.7
1000	0.23	0.36	6.3

127/220(245) kV

Nominal Cross Section Area mm ²	Capacitance μF/km	Inductance mH/km	Charging Current per phase @50Hz A/km
500	0.14	0.43	5.7
630	0.16	0.41	6.4
800	0.17	0.40	6.9
1000	0.19	0.38	7.4

160/275(300) kV

Nominal Cross Section Area mm ²	Capacitance μF/km	Inductance mH/km	Charging Current per phase @50Hz A/km
500	0.14	0.44	6.8
630	0.16	0.42	7.7
800	0.17	0.40	8.3
1000	0.18	0.39	9.0

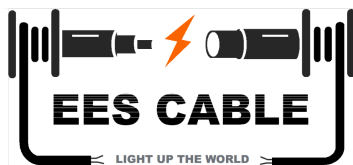

High Voltage Submarine Cables

www.eescable.com


Dimension and Weight

26/45(52) kV

Nominal Cross Section Area	Nominal Conductor Diameter	Nominal Insulation Thickness	Nominal Diameter Over Insulation	Nominal Lead Sheath Thickness	Nominal Overall Diameter	Weight
mm ²	mm	mm	mm	mm	mm	kg/m
95	11.2	8.0	29.6	1.3	109.0	20.8
120	12.6	8.0	31.0	1.3	112.0	22.3
150	14.2	8.0	32.6	1.4	116.0	24.4
185	15.8	8.0	34.2	1.4	119.0	26.2
240	18.1	8.0	36.5	1.5	124.0	29.5
300	20.4	8.0	38.8	1.6	130.0	32.9
400	23.2	8.0	41.6	1.7	136.0	37.9
500	26.2	8.0	45.0	1.8	144.0	43.2
630	29.8	8.0	48.6	1.9	152.0	49.7
800	33.7	8.0	52.5	2.1	162.0	58.6
1000	37.9	8.0	57.3	2.2	173.0	68.1

38/66(72.5) kV

Nominal Cross Section Area	Nominal Conductor Diameter	Nominal Insulation Thickness	Nominal Diameter Over Insulation	Nominal Lead Sheath Thickness	Nominal Overall Diameter	Weight
mm ²	mm	mm	mm	mm	mm	kg/m
95	11.2	9.0	31.6	1.3	113.0	21.6
120	12.6	9.0	33.0	1.4	116.0	23.8
150	14.2	9.0	34.6	1.4	120.0	25.7
185	15.8	9.0	36.2	1.4	124.0	28.0
240	18.1	9.0	38.5	1.6	129.0	31.3
300	20.4	9.0	40.8	1.6	134.0	34.3
400	23.2	9.0	43.6	1.7	141.0	39.2
500	26.2	9.0	47.0	1.9	149.0	45.4
630	29.8	9.0	50.6	2.0	157.0	52.0
800	33.7	9.0	54.5	2.1	167.0	60.1
1000	37.9	9.0	59.3	2.3	178.0	70.7

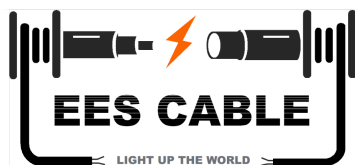

High Voltage Submarine Cables

www.eescable.com

64/110(123) kV


Nominal Cross Section Area	Nominal Conductor Diameter	Nominal Insulation Thickness	Nominal Diameter Over Insulation	Nominal Lead Sheath Thickness	Nominal Overall Diameter	Weight
mm ²	mm	mm	mm	mm	mm	kg/m
185	15.8	16.0	50.2	2.0	156.0	40.9
240	18.1	15.0	50.5	2.0	157.0	42.5
300	20.4	14.0	50.8	2.0	157.0	44.1
400	23.2	13.0	51.6	2.0	159.0	47.2
500	26.2	13.0	55.0	2.1	167.0	53.0
630	29.8	13.0	58.6	2.3	176.0	60.7
800	33.7	13.0	62.5	2.4	185.0	69.5
1000	37.9	13.0	67.3	2.6	197.0	80.5

76/132(145) kV

Nominal Cross Section Area	Nominal Conductor Diameter	Nominal Insulation Thickness	Nominal Diameter Over Insulation	Nominal Lead Sheath Thickness	Nominal Overall Diameter	Weight
mm ²	mm	mm	mm	mm	mm	kg/m
185	15.8	18.0	54.2	2.1	165.0	44.9
240	18.1	17.0	54.5	2.1	166.0	46.3
300	20.4	16.0	54.8	2.1	167.0	48.0
400	23.2	15.0	55.6	2.1	168.0	51.1
500	26.2	15.0	59.0	2.3	176.0	58.0
630	29.8	15.0	62.6	2.4	185.0	65.2
800	33.7	15.0	66.5	2.5	194.0	74.0
1000	37.9	15.0	71.3	2.7	206.0	85.4

87/150(170) kV

Nominal Cross Section Area	Nominal Conductor Diameter	Nominal Insulation Thickness	Nominal Diameter Over Insulation	Nominal Lead Sheath Thickness	Nominal Overall Diameter	Weight
mm ²	mm	mm	mm	mm	mm	kg/m
240	18.1	21.0	62.5	2.4	184.0	55.5
300	20.4	20.0	62.8	2.4	185.0	57.3
400	23.2	19.0	63.6	2.4	187.0	60.5
500	26.2	18.0	65.0	2.5	190.0	65.1
630	29.8	17.0	66.6	2.5	194.0	69.7
800	33.7	17.0	70.5	2.7	204.0	79.8
1000	37.9	17.0	75.3	2.8	215.0	90.5

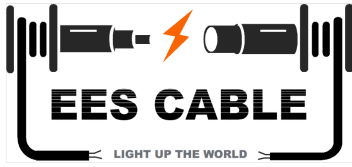

High Voltage Submarine Cables

www.eescable.com


127/220(245) kV

Nominal Cross Section Area	Nominal Conductor Diameter	Nominal Insulation Thickness	Nominal Diameter Over Insulation	Nominal Lead Sheath Thickness	Nominal Overall Diameter	Weight
mm ²	mm	mm	mm	mm	mm	kg/m
500	26.2	24.0	77.6	2.9	219.0	81.3
630	29.8	23.0	79.2	3.0	224.0	86.7
800	33.7	23.0	83.1	3.1	234.0	95.3
1000	37.9	23.0	87.3	3.1	241.0	104.0

160/275(300) kV

Nominal Cross Section Area	Nominal Conductor Diameter	Nominal Insulation Thickness	Nominal Diameter Over Insulation	Nominal Lead Sheath Thickness	Nominal Overall Diameter	Weight
mm ²	mm	mm	mm	mm	mm	kg/m
500	26.2	26.0	81.6	2.9	229.0	84.7
630	29.8	24.0	81.2	3.0	228.0	88.9
800	33.7	24.0	85.1	3.1	237.0	97.6
1000	37.9	24.0	89.3	3.1	247.0	106.3

XLPE Insulated DC High-Voltage Submarine Cable

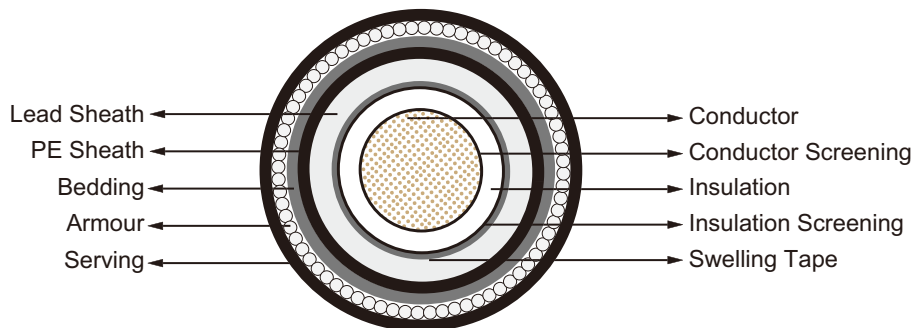

Application

These submarine cables are used for power transmission to offshore islands, oil platforms or to cross-rivers and lakes. Cable design based on the mayor national or international standards e.g. VDE, IEC and ICEA or according to customers design and standards.

Construction

- **Conductor:** Copper conductor, water blocked.
- **Conductor Screening:** Extruded semi-conductive compound.
- **Insulation:** XLPE.
- **Insulation Screening:** Extruded semi-conductive compound.
- **Separator:** Swelling tape.
- **Core Sheath1:** Lead Sheath.
- **Core Sheath2:** PE sheath.
- **Bedding:** Bedding layer.
- **Armour:** Galvanized steel wires filled with bitumen compound.
- **Serving:** Polypropylene yarn.